



Series FS 240


AC CONTINUOUS DUTY

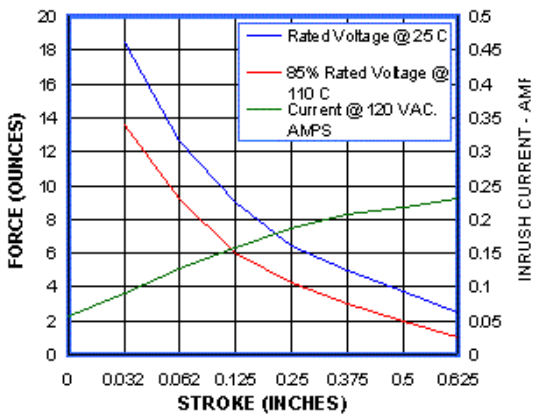



AC INTERMITTENT DUTY

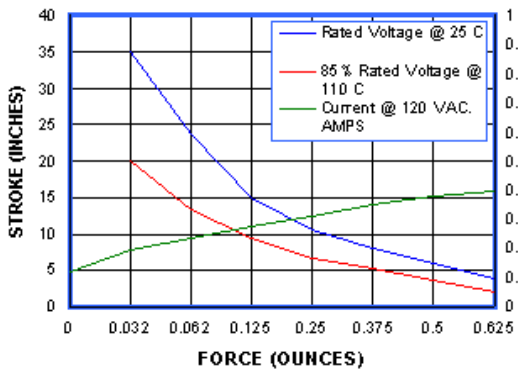

DC CONTINUOUS DUTY

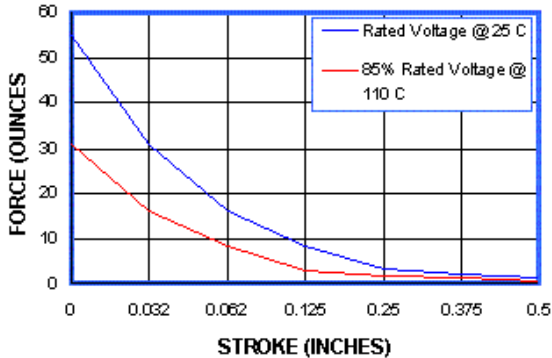

DC INTERMITTENT DUTY

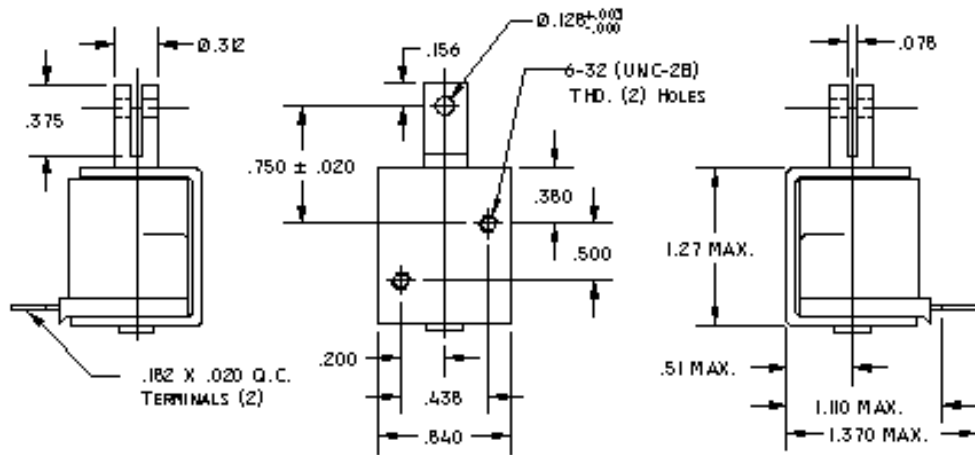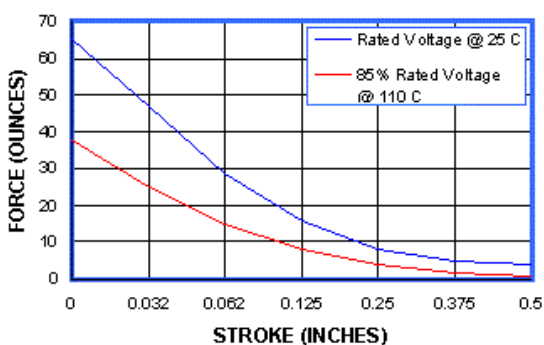

Specifications

- | | |
|---------------------------------------|--------------------------|
| 1. MAXIMUM OPERATING TEMPERATURE | 130°C |
| 2. LIFE EXPECTANCY UNDER OPTIMAL LOAD | 5X10 ⁶ CYCLES |
| 3. DIELECTRIC STRENGTH | 1500 V. RMS |
| 4. TERMINATION | 1.87 X .020 Q.C. |

INTERMITTENT DUTY CYCLE AT NOMINAL VOLTAGE IS
4 MINUTES MAXIMUM FOR A.C. AT 25% DUTY AND
5 MINUTES MAXIMUM FOR D.C. AT 25% DUTY CYCLE.

DC Models Available with Plunger Stop.

D.C.			A.C.		
DUTY	CONT.	INT.	DUTY	CONT.	INT.
D.C. POWER WATTS	5	12	A.C. POWER VA	7	14
STD. D.C. VOLTAGES	D.C. COIL RESISTANCE (OHMS)		STD. A.C. VOLTAGES 60 HZ		D.C. COIL RESISTANCE (OHMS)
6	7.2	3	12	4	2.5
12	29	12	24	20	10
110	2420	1008	120	500	310
220	9680	4033	240	2000	1240